



# 'Mini' LED Module



**L77.00.LDV**

**New!**


**A Versatile, Compact And Powerful LED Warning Lamp For A Wide Range Of Applications.**

## FEATURES

- Super low profile for discreet mounting
- Multi-Voltage Input 12~24VDC
- Built-in 12 Selectable Flash Patterns
- LEDs rated to 100,000 hours of operation.
- Non-volatile memory recalls last flash pattern used at power up.
- Multiple units are synchronizable and can flash simultaneously or alternately.
- Reverse polarity protection.
- Weatherproof and vibration resistant design for internal or external use.
- Aluminum base for heat dissipation.

## FLASH PATTERN

FP#	Flash Patterns		
0	Random	6	Quad
1	Steady	7	Quint
2	Single	8	Ultra
3	Mega	9	Single-Quad
4	Double	10	Single H/L
5	Triple	11	Single-Triple-Quint

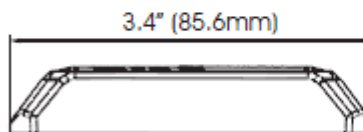

## SPECIFICATIONS

**Meets:** SAE, CA13, e13  
**Bulb:** 1W LED x 3pcs  
**Warning Patterns:** 12 Flash Patterns  
**Operating Voltage:** 12~24VDC  
**Avg. Current:** 0.2A @12.8VDC / 0.11A @24VDC  
 (varies with flash pattern)  
**Avg. Power:** 2.7 Watts (varies with flash pattern)  
**Max. Current:** 0.4A @12.8VDC / 0.22A @24VDC  
**Max. Power:** 5.5 Watts  
**Wires:** Red-Vcc: 97cm (20AWG)  
 Black-GND: 97cm (20AWG)  
 Yellow-Flash Patterns & Sync: 97cm (20AWG)  
**Fuse Recommend:** 3A  
**Multi-Unit Synchronization:** Over 15

Amber is standard colour. All other colours are subject to moq and lead time

**For more information, contact: Britax PMG Limited**

**Tel: +44 (0)1262 670161**

**Fax: +44 (0)1262 605666**

**Email: [info@britax-pmg.com](mailto:info@britax-pmg.com)**

**[www.britax-pmg.com](http://www.britax-pmg.com)**